


Patent



Portfolio

2021

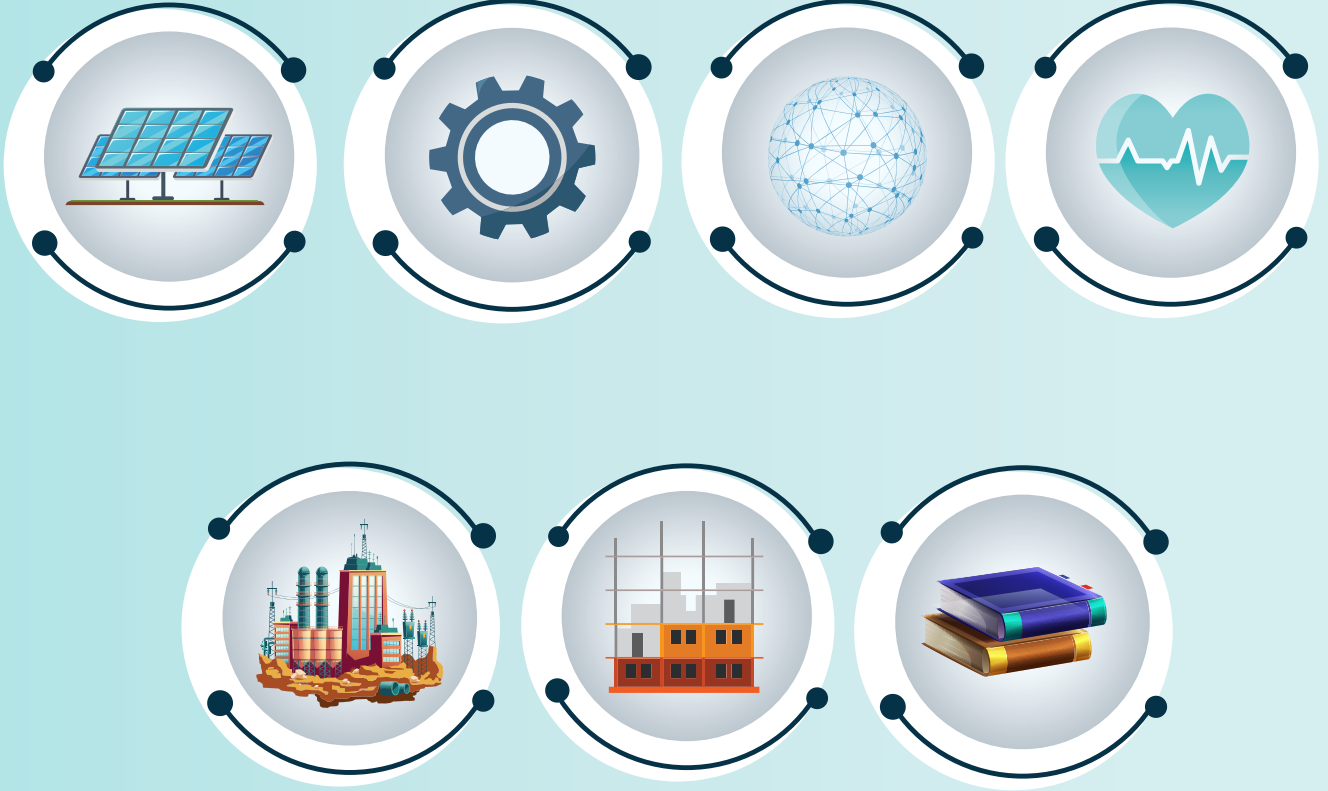

TECHNOLOGY
TRANSFER
OFFICE

Patent Portfolio

2021

PREFACE	4
OzU's TECHNOLOGY AREAS FOR LICENSING	5
LIGHTING AND ENERGY TECHNOLOGIES	6
A LIGHTENING SYSTEM THAT ADJUSTS LIGHTING DURATION AND DENSITY	7
A PREFERRED SYSTEM FOR MEASURING JUNCTION TEMPATURE OF PHOTONICS DEVICES	8
A SOLAR POWER GENERATING SYSTEM AND THE METHOD OF GENERATING ELECTRICITY AND PROVIDING HEAT IN SUCH A SYSTEM	9
FLUORESCENT PROTEIN INTEGRATED LIGHT EMITTING DIODES	10
FLOW CONTROLLED EFFECTIVE LED BASED LIGHTING SYSTEM	11
FLOW COOLED SOLID STATE LIGHTING WITH PREFERRED OPTICAL AND ADVANCED SENSING FEATURES	12
HEAT SINK COOLING WITH MOUNTED SYNTHETIC JET DEVICES SYSTEMS	13
LIGHTING INTERLAYERS FOR OPTICAL PATHS OF LIGHT EMITTING OR ABSORBING SYSTEMS	14
LIGHT ENGINE SYSTEM PREFERRED IN LED-BASED LIGHTING SYSTEMS	15
PREFERRED GEODETIC LEVELLING STAFFS AND METHOD OF USE THEREOF	16
PREFERRED OPTOTHERMAL LED LIGHTING EMBODIMENT FOR HIGH LUMEN EXTRACTION AND EXTENDED LIFETIME	17
PREFERRED THERMAL CONNECTOR FOR ELECTRONIC SYSTEMS	18
MECHANICAL AND THERMAL TECHNOLOGIES	19
AN ADAPTIVE VENT SYSTEM FOR PROVIDING LOCALIZED AND CUSTOMIZED THERMAL COMFORT	20
FLOW SYSTEM FOR AVOIDING PARTICLE AGGLOMERATION	21
RADIAXIAL FLUX MOTOR WITH A CONICAL STATOR AND ROTOR ASSEMBLY	22
INFORMATION & COMMUNICATION TECHNOLOGIES	23
A METHOD FOR INDICATING INTEREST POINTS IN A MEDIA PLAYER	24
ADAPTIVE MULTIPLE INPUT MULTIPLE OUTPUT (MIMO) OPTICAL ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING (O-OFDM) BASED VISIBLE LIGHT COMMUNICATION	25
COMMUNICATION BETWEEN VEHICLES OF A PLATOON	26
FAILURE PROTECTION FOR SOFTWARE DEFINED NETWORKS USING MULTI-TOPOLOGY ROUTING BASED FAST REROUTE	27
METHOD OF QUANTUM KEY DISTRIBUTION VIA LOAD NODE	28
OPTICAL DATA TRANSMISSION FOR SWIMMERS	29
RANDOM NETWORK CODING IN ORTHOGONAL FREQUENCY DIVISION MULTIPLE ACCESS (OFDMA) NETWORKS USING CONTROL SIGNALING	30
SYSTEM AND METHOD FOR SPEED ESTIMATION, DETECTION AND RANGING USING VISIBLE LIGHT IN VEHICLES	31

HEALTH TECHNOLOGIES	32
A WEARABLE LOWER EXTREMITY EXOSKELETON	33
METHOD AND SYSTEM RELATED TO A PORTABLE ULTRASONIC IMAGING SYSTEM	34
VERTICAL GAP ACTUATOR FOR ULTRASONIC TRANSDUCERS AND FABRICATION OF THE SAME	35
WEARABLE ARM SUPPORT	36
INDUSTRIAL APPLICATIONS	37
AN ATOMIZER AND ATOMIZATION SYSTEM USING THE SAME	38
AN ELECTROMAGNETIC ACTUATOR TO ACHIEVE SOFT LANDING AND THE CONTROL METHOD THEREOF	39
ROBOTIC MANIPULATOR INCLUDING PNEUMATIC ARTIFICIAL MUSCLE	40
CONSTRUCTION MATERIALS	41
CEMENT-BASED COMPOSITIONS WITH IMPROVED RHEOLOGICAL PROPERTIES AND METHODS FOR PRODUCTION THEREOF	42
COMPOSITE UNBONDED PRECAST CONCRETE SHEAR WALLS	43
MANUFACTURING METHOD FOR A BUILDING SYSTEM IN REGARDS TO STRUCTURAL AND ENVIRONMENTAL FACTORS	44
EDUCATIONAL TECHNOLOGIES	45
MARTIAL ARTS TRAINING GADGET	46
PARALLEL PLATE CAPACITOR WITH ADJUSTABLE CAPACITANCE	47



PREFACE

Director's Message

One of the most exciting sides of academic life, is to see your research outputs turn into a technology, an innovation and a patent.

One of the most exciting side of being a leading TTO, is to see your patent portfolio become a subject of commercialization. This year we are honored share with you a decade worth patent collection of Özyeğin University and invite you to become our partners in their commercialization.

Sincerely,

Dr. Ismail Ari

Director of Knowledge, Technology
Transfer and Entrepreneurship

ÖNSÖZ

Direktörün Mesajı

Akademik hayatın en heyecanlı taraflarından birisi, araştırma çıktılarının bir teknolojiye, yeniliğe ve patente dönüştüğünü görmektir.

Öncül bir TTO olmanın en heyecanlı yanı ise, patent portföyünüzün ticarileşmeye konu olduğunu görmektir. Bu yıl sizlerle Özyeğin Üniversitesi'nin 10 yıllık patent birikimini paylaşmaktan gurur duyuyor ve ticarileşmeleri konusunda ortaklığa davet ediyoruz.

Saygılarımla,


Dr. İsmail Arı

Bilgi, Teknoloji Transferi ve
Girişimcilik Direktörü

OzU's Technology Areas for Licensing



**Lighting & Energy
Technologies**



**Mechanical & Thermal
Technologies**




**Information &
Communication
Technologies**



**Health
Technologies**



**Industrial
Applications**





**Construction
Materials**



**Educational
Technologies**

Lighting & Energy Technologies

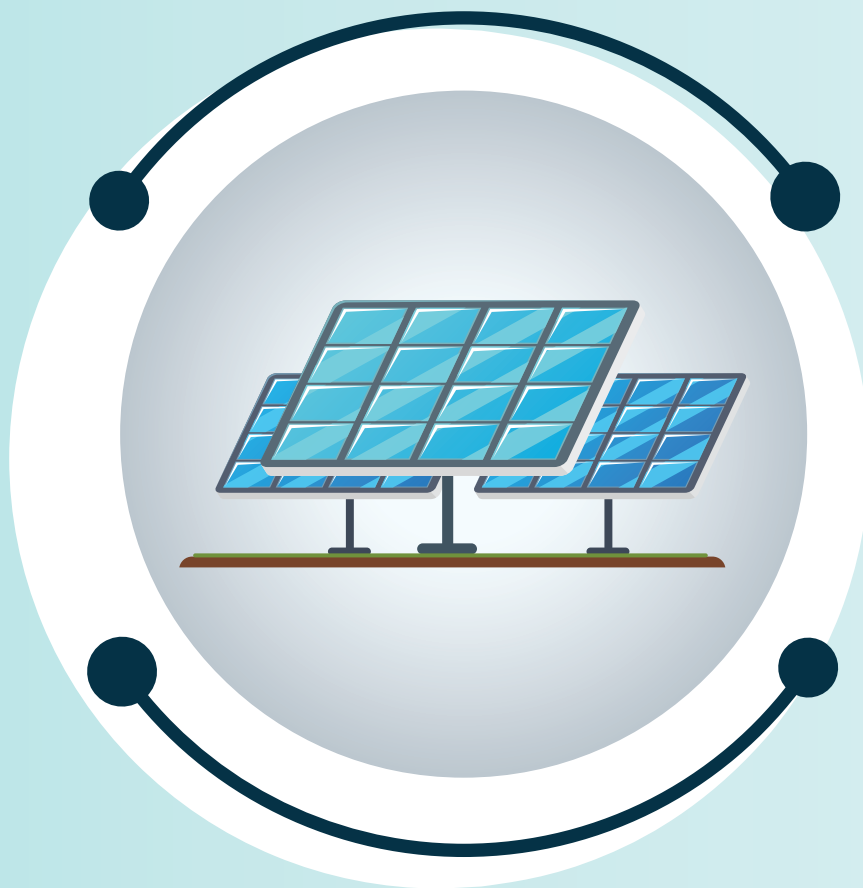



A LIGHTENING SYSTEM THAT ADJUSTS LIGHTING DURATION AND DENSITY



Inventors:

- Asst. Prof. Özkan Bebek
- Sabri Orçun Orhan



Potential Areas of Application:

- Lighting
systems



State of Development:

- TRL 5




Patent Status:

- TR2014/08817


Invention Summary:

Current technology provides automatic lighting systems that recognize one's movement. However, in these systems lighting sensors are programmed to remain open for a determined period of time, and it switches off itself even if the person is still present and needs light. Sometimes, sensors are programmed to remain for a long time to prevent this problem; however, it causes decrease in energy efficiency. The invention is comprised of Passive Infra-Red (PIR) sensor, which is the most suitable system for automatic lighting.

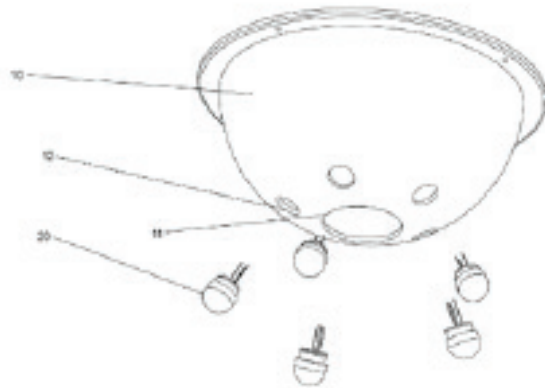

Main Advantages:

- To provide energy efficiency
- Easy integration to the LED light bulbs due to the small size of the sensor
- Low-cost



A PREFERRED SYSTEM FOR MEASURING JUNCTION TEMPERATURE OF PHOTONICS DEVICES



Inventors:

- Prof. Mehmet Arık
- Enes Tamdoğan
- Burak Özlük
- Ahmet Mete Muslu



Potential Areas of Application:

- Photonics devices



State of Development:

- TRL 5




Patent Status:

- WO2020139208A1

Invention Summary:

As electronic packages are getting smaller day by day, generated heat fluxes are also becoming more intense and induce serious lifetime and performance issues on consumer devices.

Light emitting diodes (Photonic devices) are also one of these photonics products and they are the future of lighting industry. The invention relates to an embodiment which cools down LED lamps efficiently, and to the integration of the cooling system with the LED lamp.



Main Advantages:

- The opportunity to customize a personalized plan for junction temperature measurement by choosing the desired settings for a particular photonics device
- Most of the process will be facilitated with suggested default settings by the software and user may need to enter only the operating current of a particular photonics device and run the device without any extra action required by user during the measurement.
- More practical
- Time saving



A SOLAR POWER GENERATING SYSTEM AND THE METHOD OF GENERATING ELECTRICITY AND PROVIDING HEAT IN SUCH A SYSTEM



Inventors:

Tufan Akba



Potential Areas of Application:

- Solar energy systems



State of Development:

- TRL 2




Patent Status:

- WO2020068011A1


Invention Summary:

The present invention proposes a system and method for micro-scale systems that generate electrical energy and heat from solar energy, which addresses the need for low-cost heat and electricity generation. The system and method proposed in this invention provide cost and system life advantages for electricity generation companies. It is foreseen that the said solar energy generation system and method can be applied in residential and industrial applications, connected to the electricity grid, or independent from the grid.

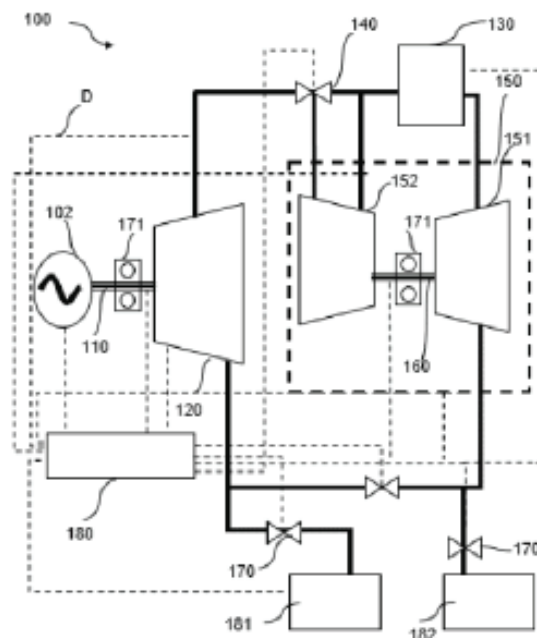

Main Advantages:

- Longer working life
- Cost effective



FLUORESCENT PROTEIN INTEGRATED LIGHT EMITTING DIODES



Inventors:

- Assoc. Prof.
Sedat Nizamoğlu



Potential Areas of Application:

- Lighting systems
- LEDs



State of Development:

- TRL 3



Patent Status:

- TR2013/15075

Invention Summary:

Bio-friendly, energy efficient and high-color quality solid-state lighting is required due to the current limitations of phosphor-based LED technology and the currently investigated nanocrystal-integrated LED technology.

The invention is comprised of Passive Infra-Red (PIR) sensor, which is the most suitable system for automatic lighting. The PIR sensor array not only detects the movements, but also perceives the presence of a person.

Main Advantages:

- Efficient and stable white light generation by strong absorption, high fluorescence quantum yields and high photostability
- The custom-designed emission spectrum by the narrow-emission linewidth of fluorescent proteins
- Biocompatible characteristics (green lighting)



FLOW CONTROLLED EFFECTIVE LED BASED LIGHTING SYSTEM



Inventors:

- Prof. Mehmet Arık
- Muhammed Nasır İnan



Potential Areas of Application:

- Lighting systems



State of Development:

- TRL 7



Patent Status:

- US9464802B2


Invention Summary:

LED chips or LED packages used in LED lamps and generating light convert the majority of the energy used into heat. A heat sink with the required cooling capacity maintains the chip temperature at a secured level and meanwhile needs to meet the optical, mechanical and aesthetic criteria of LED lamps. The present invention is related to a lighting system that cools the LED lamps and the lamps in which said system is applied.



Main Advantages:

- Low weight
- The luminous efficacy
- Light quality
- System reability
- Life span



A FLOW COOLED SOLID STATE LIGHTING WITH PREFERRED OPTICAL AND ADVANCED SENSING FEATURES



Inventors:

- Prof. Mehmet Arık
- Muhammed Nasır İnan



Potential Areas of Application:

- Lighting systems



State of Development:

- TRL 7




Patent Status:

- EP3308072B1
- TR201804359T3
- US10359186B2
- WO2018034628A1

Invention Summary:

Prior LED lamps and heat sinks have not had sufficient capacity that allow for high luminous flux and that perform the cooling required for LED lamps generating high heat. The present invention addresses some problems by providing a highly efficient lighting apparatus and controlled lighting system and method that enables air to efficiently flow and perform the cooling process, and in particular to perform the cooling process for the LEDs, phosphor, and the driver circuit. The lighting apparatus, system, and method can be combined with the preferred optical features and sensing, data collection and data sharing features.

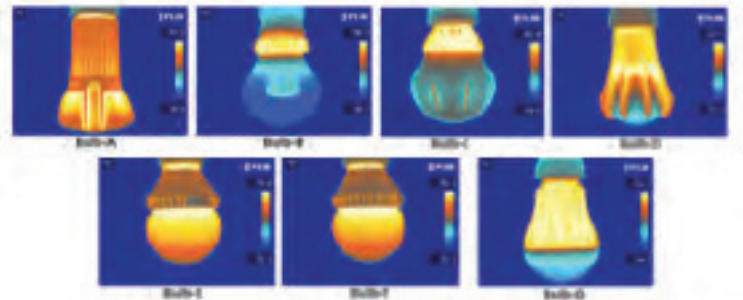

Main Advantages:

- Cooling efficiency
- Thermally and optically optimized lighting apparatus
- Potential integration of sensors



HEAT SINK COOLING WITH MOUNTED SYNTHETIC JET DEVICES SYSTEMS



Inventors:

- Prof. Mehmet Arık
- Muhammad Ikhlāq



Potential Areas of Application:

- Electronics cooling
- Lighting systems
- LEDs
- HVAC systems
- Chillers



State of Development:

- TRL 3-4




Patent Status:

- US10629514B2
- WO2017099677A1

Invention Summary:

Heat sinks are the passive cooling components used for removing the heat released by the electronic devices. In the systems where active cooling is used, the actively cooled heat sink with fans decreases the reliability of the system and causes extra energy loss. The lighting system of the present invention, heat sink, optical structure (LED chip and phosphor like materials, and diffuser and electronic circuit members are configured in an integrated manner.

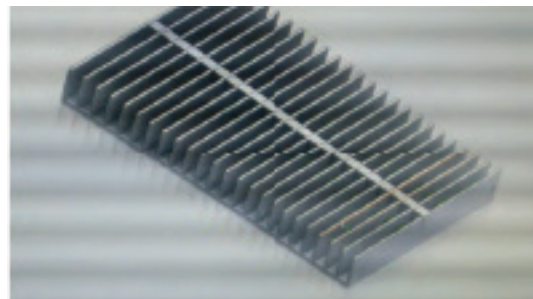

Main Advantages:

- To cool down the LED chips and other electronic circuit members as the driver in a multi-purpose manner
- Reaching high performance cooling
- Reducing heat sink size and weight
- Cause drastic cost reduction
- Increasing lifetime



LIGHTING INTERLAYERS FOR OPTICAL PATHS OF LIGHT EMITTING OR ABSORBING SYSTEMS



Inventors:

- Prof. Mehmet Arık
- Assoc. Prof.
Sedat Nizamoğlu



Potential Areas of Application:

- Lighting
systems



State of Development:

- TRL 3




Patent Status:

- EP3345226A1
- US2018366620A1
- WO2017111752A1

Invention Summary:

Various different coating constructs or lens based systems are used with a view to enhancing the luminous efficacy of LEDs. Said coating constructs are commonly epoxy materials. Epoxy and silicon materials available in optical paths of LEDs have a low thermal performance. Present technology provides lighting systems emitting or absorbing light, and containing at least one radiation layer which is located along the optical path of light with or without phosphor, and makes radiation by absorbing light and contains silk fibroin, and is capable of controlling the light distribution.

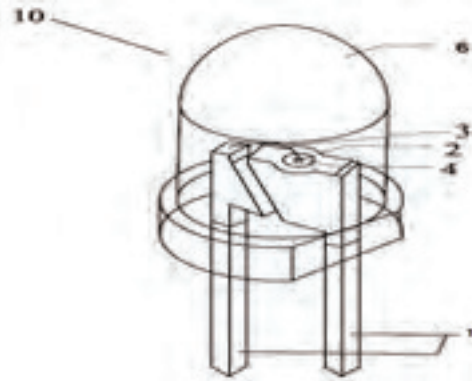

Main Advantages:

- Increasing illuminating capacity of LEDs
- Keeping the heating occurring in LED during illumination below the average heating values
- Obtaining a non-synthetic lighting interlayer that is recyclable in nature



LIGHT ENGINE SYSTEM PREFERRED IN LED-BASED LIGHTING SYSTEMS



Inventors:

- Prof. Mehmet Arık
- Ferina Saati



Potential Areas of Application:

- LED based lighting system



State of Development:

- TRL 3




Patent Status:

- EP3335529A1
- TR201514689A2
- US10506703B2
- US2018184513A1
- WO2017086893A1

Invention Summary:

In the background of technology various type of PCBs structures are used to allow the use of multifunctional LEDs (light emitting diodes) in automotive industry applications. The technology relates to cooling units developed in LED applications in automotive industry and it also uses advanced printed circuit board technologies that minimizes the heat resistance and renders heat conductivity more efficient and productive compared to standard printed circuit boards.

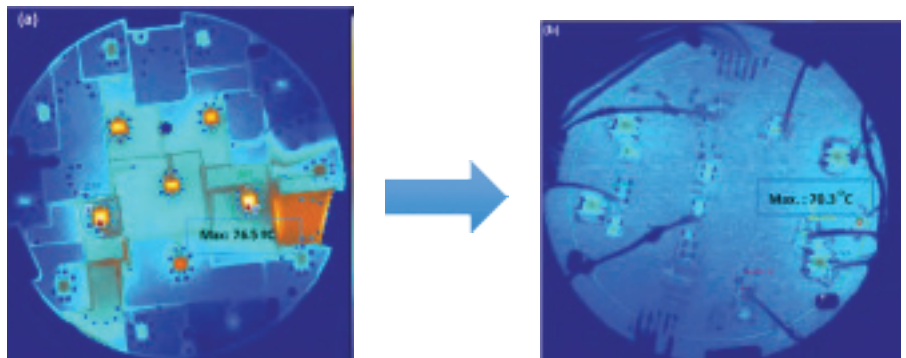

Main Advantages:

- Eliminating local hotspots on the PCB
- Enabling dissipation of heat generated in PCBs over the board
- Creating a structure preventing the heating of PCB boards
- Extending useful operating life.



PREFERRED GEODETIC LEVELLING STAFFS AND METHOD OF USE THEREOF



Inventors:

- Prof. Mehmet Arık
- Prof. Halis Saka
- Prof. Cemal Özer Yiğit



Potential Areas of Application:

- Measurement systems



State of Development:

- TRL 3




Patent Status:

- WO2020106231A1

Invention Summary:

Levelling is an optical method that provides measurements of geodetic heights using a level that is configured to read a levelling staff for measuring and calculating elevation at selected positions. The present invention relates to a levelling staff and a level for a geodetic levelling. More specifically, the present invention relates to lighted levelling staff which is used to determine the difference in height between points or heights of points above a datum surface.

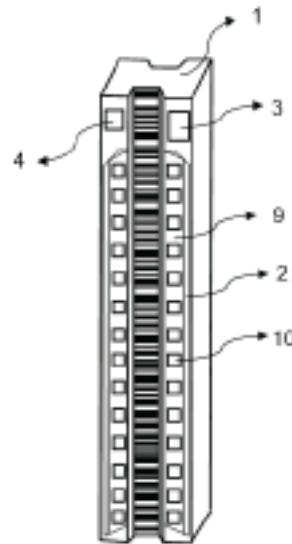

Main Advantages:

- Perform accurate measurement while minimizing human error in low-light or no-light conditions
- Inexpensive
- Affordable
- Easy to produce



PREFERRED OPTOTHERMAL LED LIGHTING EMBODIMENT FOR HIGH LUMEN EXTRACTION AND EXTENDED LIFETIME



Inventors:

- Prof. Mehmet Arık
- Enes Tamdoğan



Potential Areas of Application:

- Lighting
systems



State of Development:

- TRL 3




Patent Status:

- US9435530B2

Invention Summary:

Various cooling methods are used in different LED lamp types (especially in lamps having different power and light intensity). The general aim of all these cooling methods is to prevent the problems that are likely to occur due to the high heat formed during operation. The invention relates to an embodiment which cools down LED lamps efficiently, and to the integration of the cooling system with the LED lamp.

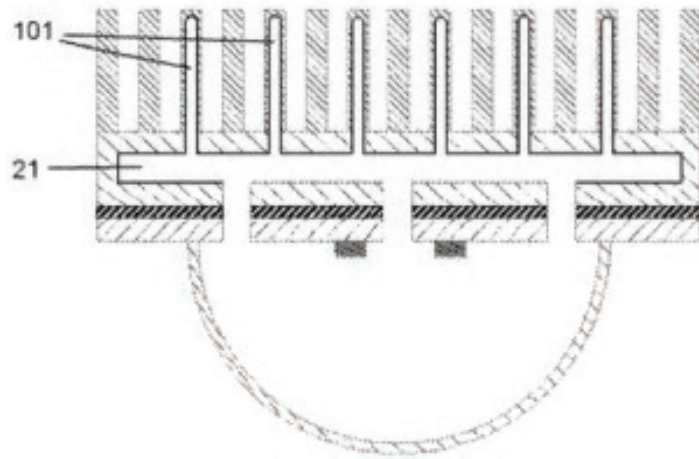

Main Advantages:

The invention;

- Cool downs LED lamps in an efficient manner,
- Increases the durability and the amount of light to be obtained from LED lamps,
- Reduces the weight thereof.
- Eliminates local temperature difference (local hotspots) in LED chips.



PREFERRED THERMAL CONNECTOR FOR ELECTRONIC SYSTEMS



Inventors:

- Prof. Mehmet Arık
- Enes Tamdoğan
- Ahmet Mete Muslu
- Şevket Yürüker



Potential Areas of Application:

- Thermal connectors



State of Development:

- TRL 3




Patent Status:

- WO2020005175A1

Invention Summary:


The present invention addresses possible problems such as insufficient clamping force, low thermal conductance, hardly accessible clamping adjustment, etc., by providing a thermal connector including: two wedges with opposed inclined surfaces; a tightening screw accessible at one wedge for keeping the assembly together; a tightening hole wherein the tightening screw threaded section goes into; and an optional stabilization hole wherein the thermal connector needs to be stabilized before activating one wedge and expanding.

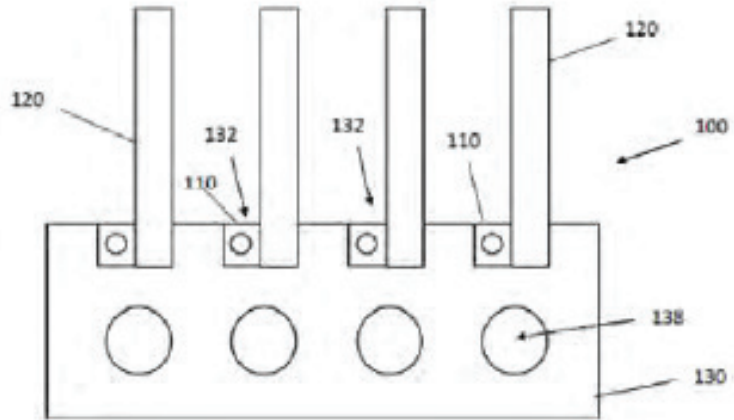

Main Advantages:

Embodiments of the present invention provide both accessible adjustment of required clamping force and minimized thermal resistances.

Mechanical & Thermal Technologies

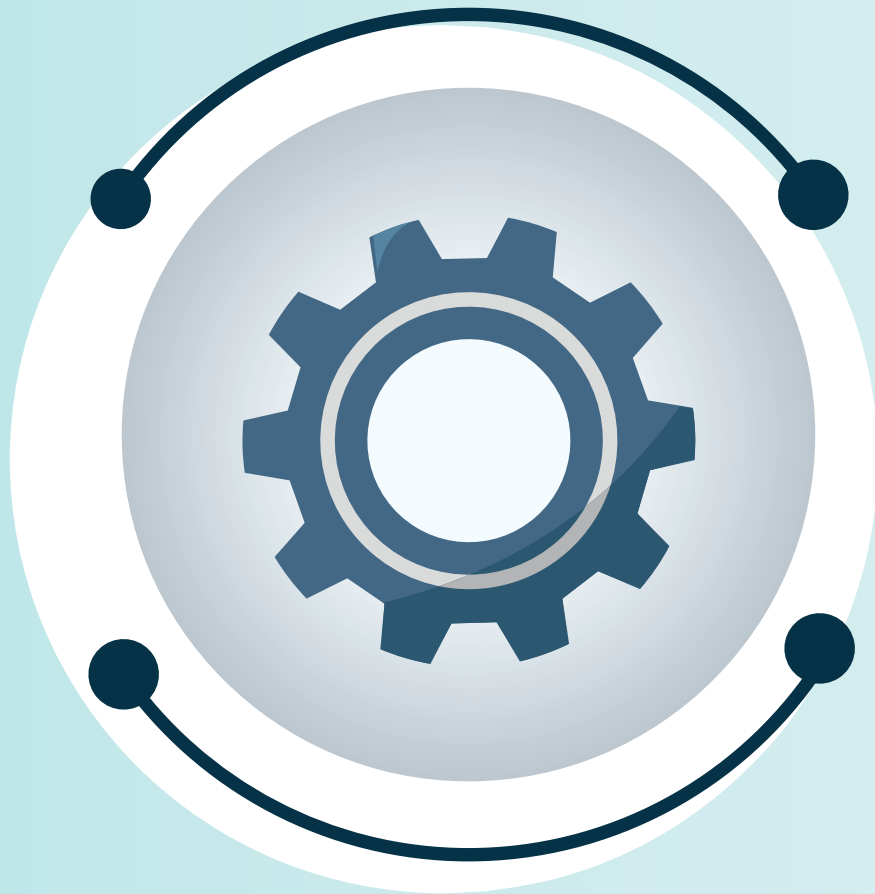



AN ADAPTIVE VENT SYSTEM FOR PROVIDING LOCALIZED AND CUSTOMIZED THERMAL COMFORT



Inventors:

- Prof. Pınar Mengüç
- Cem Keskin



Potential Areas of Application:

- Heating systems
- Ventilation systems
- Air conditioning (HVAC) systems



State of Development:

- TRL 3




Patent Status:

- WO2021040634A1

Invention Summary:

The present invention relates to an adaptive vent system for providing localized and customized thermal comfort conditions, specifically a vent system controlling air flow direction in order to manage non-uniformity of temperature distribution in an indoor environment -in accordance with specific demand of a person or group of people occupying a sub-space inside a room. The invention aims to provide customized thermal environments around the occupants in open offices according to their preferences.

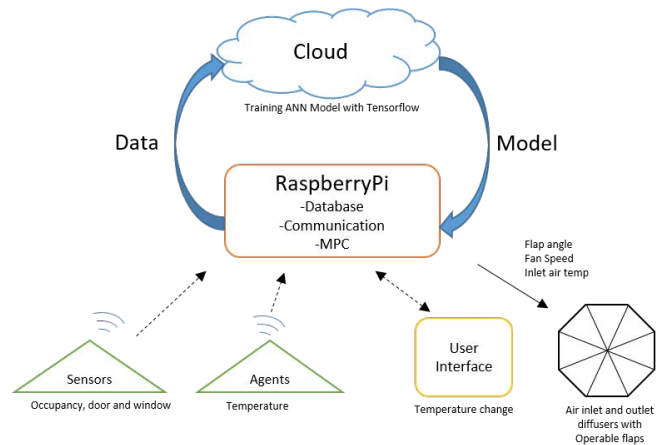

Main Advantages:

- Adaptive
- Efficiency
- Environmental impact
- Localized and customized



FLOW SYSTEM FOR AVOIDING PARTICLE AGGLOMERATION



Inventors:

- Prof. Ali Koşar
- Prof. Kürşad Şendur
- Prof. M. Pınar Mengüç



Potential Areas of Application:

- Heat Transfer
- Fluid Flow
- Particle Agglomeration
- Nanofluids



State of Development:

- TRL 3




Patent Status:

- EP3365627B1
- JP6559363B2
- US10837604B2
- WO2017069712A1
- TR201517535

Invention Summary:

Nanofluids are considered to be the next-generation heat transfer media as they offer exciting new possibilities to enhance heat transfer performance compared to conventional fluids. Such fluids such as water, ethylene glycol and oils have limited thermal properties in comparison to new generation nanofluids.

The present invention proposes a flow system for avoiding particle agglomeration in nanofluids, comprising a flow restrictive element which in use provides sudden expansion mechanism where cavitation takes place in the fluid upon exiting the flow restrictive element. The new method and system use the forces of nature such as sudden expansion and additional heat transfer via plasmonic near-field radiation transfer, into effect.

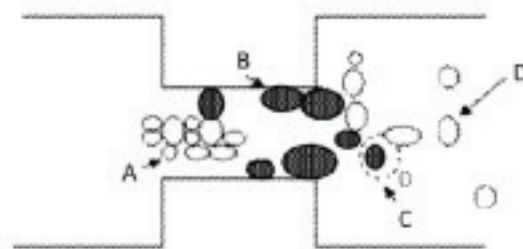

Main Advantages:

- Economical since no expensive chemicals are included
- More effective
- High Performance
- Biocompatible



RADIAXIAL FLUX MOTOR WITH A CONICAL STATOR AND ROTOR ASSEMBLY



Inventors:

- Prof. Caner Aküner
- Uğur Demir



Potential Areas of Application:

- Assembly of
Motor Mechanics



State of Development:

- TRL 3




Patent Status:

- EP3350908A1
- TR201805615T3
- WO2017196269A1

Invention Summary:

Prior motors, in particular induction motors, have had several disadvantages. Prior motors use a significant amount of air space and can be large and heavy when assembled, making shipping of an electric motor costly. In order to get enough shaft torque, motor length should be increased mostly. The present invention provides for advantageous conical geometry of a stator and a rotor, thereby providing both radial flux and axial flux ("radiaxial" flux) simultaneously.

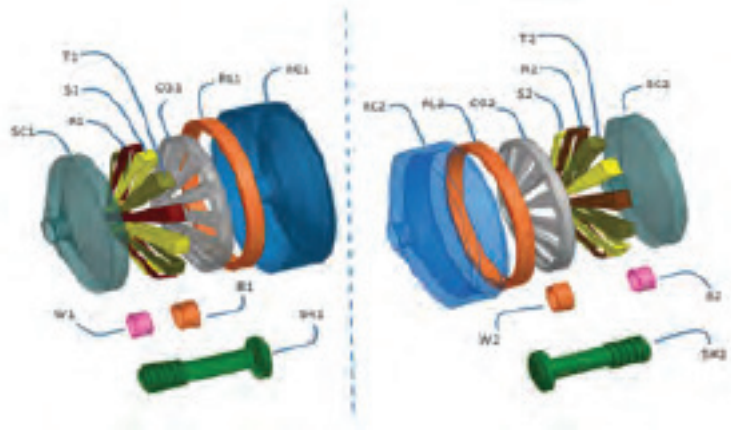

Main Advantages:

- Invention maximizes and/or optimizes the radial space available in order to advantageously use the increased radial dimension of a conical design to increase the moment arm to increase available torque at the drive shaft of the motor.
- The present invention provides for increased efficiency, torque-speed, and improved space utilization for a motor.

Information & Communication Technologies





A METHOD FOR INDICATING INTEREST POINTS IN A MEDIA PLAYER



Inventors:

- Assoc. Prof. Ali Cengiz Beğen



Potential Areas of Application:

- Media Player Systems



State of Development:

- TRL 6



Patent Status:

- WO2021040636A1

Invention Summary:

Almost all media players have a seek bar (also known as scrub bar or scrubber) that allows the viewer to go forward or backward in the media timeline to consume a desired portion of the media. The present invention relates to a method for indicating interest points in a media player, specifically the interest points being determined based on the interactions of viewers with the media player. This invention is about using this analytics data to enhance the functionality of the scrubber in the player.



Main Advantages:

- An analytics-based solution dynamically showing the points of interest in the media timeline
- Better and more user-friendly navigation capability
- Suitability for all video streaming and sharing tools
- Adaptable to the technology of media players for local playback



ADAPTIVE MULTIPLE INPUT MULTIPLE OUTPUT (MIMO) OPTICAL ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING (O-OFDM) BASED VISIBLE LIGHT COMMUNICATION



Inventors:

- Prof. Murat Uysal
- Asst. Prof. R.Çağlar Kızıllırmak
- Asst. Prof. Tuncer Baykaş
- Ömer Narmanlıoğlu



Potential Areas of Application:

- Communication Technology



State of Development:

- TRL 3




Patent Status:

- US10020882B2

Invention Summary:

Visible light communication (VLC) is a short range optical wireless data transmission method that uses the illumination infrastructure as wireless access points. In indoor environments, the channel conditions and achievable signal-to-noise ratio is highly dependent on the user location. This requires the development of adaptive physical layer technologies tailored for VLC systems that automatically adjust transmission parameters according to channel conditions. This invention presents a new method and system for adaptive VLC where several transmission parameters such as modulation size/order, type and configuration of multi-input multi-output (MIMO) communication techniques are optimally adjusted according to channel conditions.

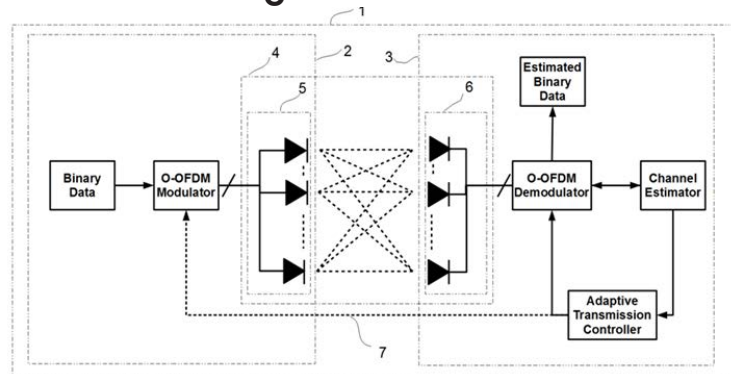

Main Advantages:

- Adaptively choosing transmission parameters according to channel conditions
- Improved link reliability
- Increased data rate



COMMUNICATION BETWEEN VEHICLES OF A PLATOON



Inventors:

- Prof. Murat Uysal
- Prof. Serhat Erküçük
- Ömer Narmanlıoğlu



Potential Areas of Application:

- Commercial, Civilian and Military Platoon Communications



State of Development:

- TRL 3




Patent Status:

- EP3257171B1
- US10204519B2
- WO2017111717A1

Invention Summary:

Platoon formation of vehicles is a critical foundation for autonomous or semi-autonomous vehicle control improving road safety, traffic flow, and environmental concerns towards the realization of intelligent transportation systems. Radio frequency (RF) wireless technologies are typically used to enable vehicle-to-vehicle communications. The objective of the proposed invention is to provide a secure and reliable transmission between consecutive and non-consecutive vehicles in a platoon system through the use of visible light communication (VLC) technology.

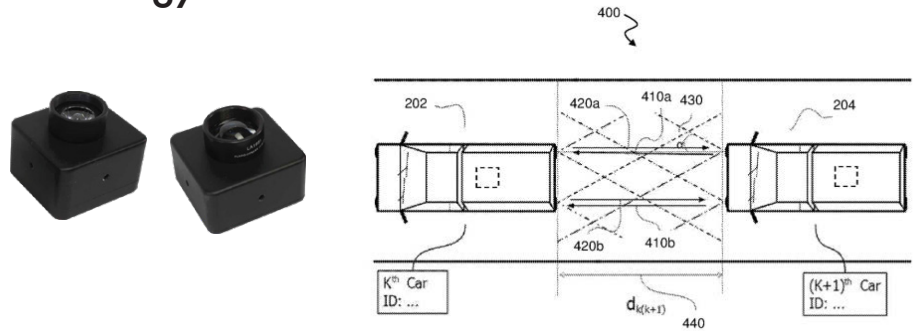

Main Advantages:

- Secure and reliable data communications within a vehicular platoon
- Determining vehicle positions without the need of an external system such as a GPS
- System based on low-cost and energy-efficient VLC technology



FAILURE PROTECTION FOR SOFTWARE DEFINED NETWORKS USING MULTI-TOPOLOGY ROUTING BASED FAST REROUTE



Inventors:

- Asst. Prof. Selçuk Cevher



Potential Areas of Application:

- Software Information Systems



State of Development:

- TRL 4-5




Patent Status:

- US10110472B2

Invention Summary:

The data traffic being transmitted in the forwarding plane of software defined networks (SDN) may be disrupted due to the unexpected link/switch failures or planned maintenance tasks. Within the scope of invention, a software defined networking (SDN) controller and methods based on multi topology routing for protecting against failure of a network element in a forwarding plane are provided.

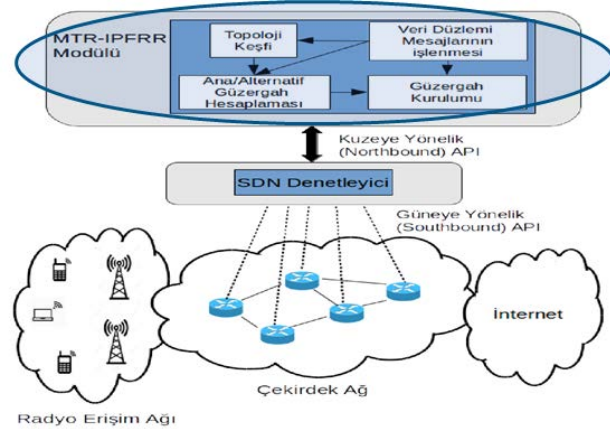

Main Advantages:

- Performance and efficiencies.
- The recovery process from network failures in the forwarding plane can be controlled from a single point. This greatly simplifies the design and operation of the network.
- The network failures in the forwarding plane can be automatically recovered without the manual intervention of a network operator.
- Offering flexibility to perform failure recovery and traffic engineering tasks simultaneously.



METHOD OF QUANTUM KEY DISTRIBUTION VIA LOAD NODE



Inventors:

- Asst. Prof. Kadir Durak
- Burak Kebapçı



Potential Areas of Application:

- Cryptography



State of Development:

- TRL 5-6




Patent Status:

- TR201821269A2
- WO2020142033A1

Invention Summary:

Existing fiber based and free space optical links have limited range due to the transmission losses. Transmission losses inside an optical fiber limits the maximum achievable quantum key distribution range to hundred(s) of kilometers. Free space optical links have direct line-of-sight access problem due the shape of the Earth, which requires elevated nodes. The invention relates generally to the quantum cryptographic systems and more specifically to the extension of distances to quantum key delivery in order to establish a quantum communication network.

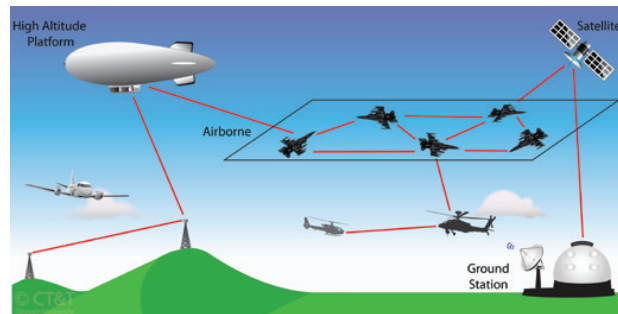

Main Advantages:

Invention provides solution to:

- Solution for limited free space and fiber-based optical link range
- Solution for line-of-sight access for free-space optical links
- Secure and random transfer of quantum keys to distant targets that are out of link range
- Easy implementation of the courier drone for establishing a quantum cryptography network



OPTICAL DATA TRANSMISSION FOR SWIMMERS



Inventors:

- Prof. Mehmet Reha Civanlar
- Prof. Murat Uysal



Potential Areas of Application:

- Underwater communication systems



State of Development:

- TRL 3




Patent Status:

- WO2020204849A1

Invention Summary:

Waterproof headphones play only stored data and cannot be connected to a remote data source. Besides, the lack of a system to provide direct communication between a swimmer and an instructor is another problem encountered in the prior art. There is a need for a data transmission system to solve the problems of broadcasting data from the surface to underwater wherein a sufficient bandwidth for multi-channel audio transmission and reliable connection can be established. The invention relates to an underwater communication system capable of increasing data transmission through the visible light between the surface and the underwater swimming pool.

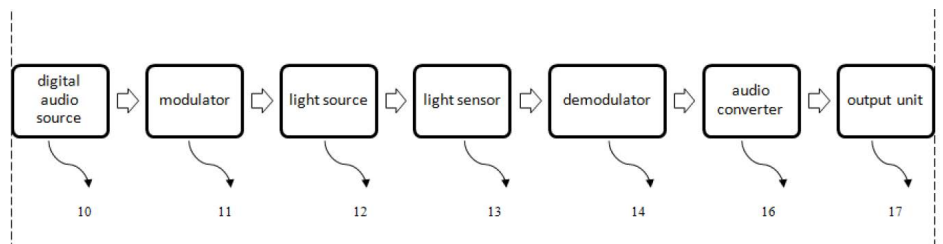

Main Advantages:

- High data transmission speed with low cost visible light source
- Instant, efficient and faster data transmission
- Direct communication between the surface and the underwater



RANDOM NETWORK CODING IN ORTHOGONAL FREQUENCY DIVISION MULTIPLE ACCESS (OFDMA) NETWORKS USING CONTROL SIGNALING



Inventors:

- Prof. Murat Uysal
- Prof. Güneş Zeynep Karabulut Kurt
- İbrahim Altunbaş
- Semiha Tedik



Potential Areas of Application:

- Wireless Communication Networks
- Internet of Things



State of Development:

- TRL 3




Patent Status:

- EP3335345B1
- WO2017091177A1
- TR2015/014750

Invention Summary:

Rapidly increasing mobile traffic has become a serious concern for current wireless networks. To enable communication among these devices with limited radio resources, major structural changes are expected to take place in next generation Internet. The present invention is a multi-carrier and multi-way random network coded cooperative communication system. Through the deployment of relay nodes, efficient resource utilization mechanisms are devised for scalable wireless networks with randomly changing topologies.

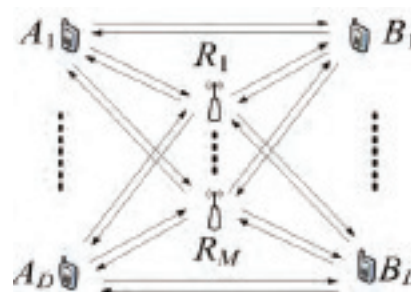

Main Advantages:

- Enabling cooperative communications
- Enhancing coverage area
- Reducing the total transmit power
- Improving outage performance



SYSTEM AND METHOD FOR SPEED ESTIMATION, DETECTION AND RANGING USING VISIBLE LIGHT IN VEHICLES



Inventors:

- Prof. Murat Uysal
- Hisham FadlAllah M. Abuella
- Sabit Ekin



Potential Areas of Application:

- Intelligent Transportation Systems
- Speed Monitoring



State of Development:

- TRL 3




Patent Status:

- US10768194B2

Invention Summary:

Monitoring drivers' speed constitutes a critical issue for safety regulation agencies and automotive industry. Most of speed monitoring systems are based on measuring the speed of vehicles using a well-known RADAR or LIDAR systems that use RF signal or laser signals, respectively. The subject of invention is a visible light based speed estimation method called as VILDAR. Superior performance is obtained compared to the state-of-art detectors RADAR and LIDAR, both of which have relatively poor performance in fast incidence angle changing scenarios. Other potential application areas of VILDAR include ranging detection and collision avoidance for autonomous vehicles.

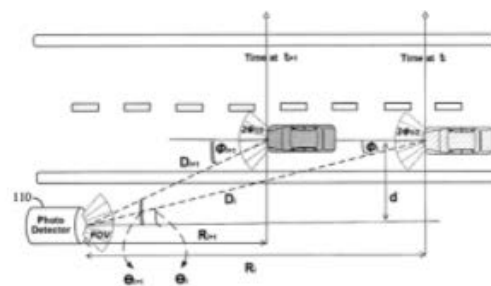

Main Advantages:

- Better speed estimation accuracy for a wide range of incidence angles
- One-way signal model which is less susceptible to noise and path-loss

Health Technologies





A WEARABLE LOWER EXTREMITY EXOSKELETON



Inventors:

- Asst. Prof. Barkan Uğurlu
- Asst. Prof. Polat Şendur
- Mustafa Derman
- Mehmet Can Yıldırım
- Sinan Çoruk
- Sinan Emre



Potential Areas of Application:

- Medical equipment/ medical prosthesis manufacturing



State of Development:

- TRL 5-6




Patent Status:

- WO2020256663A1

Invention Summary:

The present invention relates to a wearable lower extremity exoskeleton for regenerating lower body motion functionality of paraplegic patients without additional/external support. Embodiments of the present invention relate to a wearable lower extremity exoskeleton for regenerating lower body motion functionality of paraplegic patients. The exoskeleton has active DOF and each DOF provided by an actuator disposed around the hip level and back and/or front of the user and articulations.

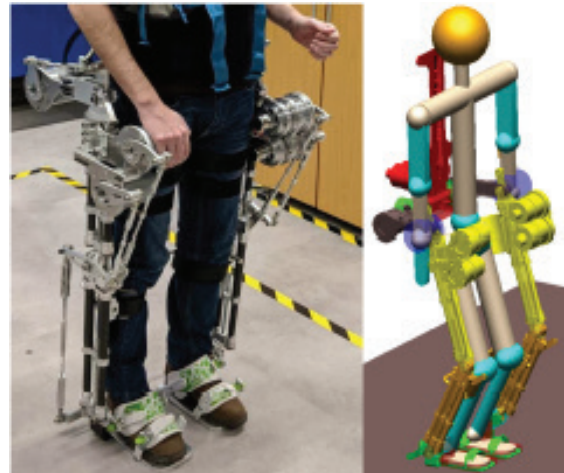

Main Advantages:

- Providing balance without crutches



METHOD AND SYSTEM RELATED TO A PORTABLE ULTRASONIC IMAGING SYSTEM



Inventors:

- Asst. Prof. Göksenin Yaralıoğlu



Potential Areas of Application:

- Ultrasound Imaging
- Medical Imaging



State of Development:

- TRL 5





Patent Status:

- WO2015142306A1
- TR2014/03256

Invention Summary:

Ultrasonography is an ultrasound based medical imaging technique widely used in medicine. There is a need for low cost and portable ultrasound imaging systems. The proposed technique uses motion sensors that are embedded with the probe to track the position of the ultrasound signals. This eliminates the use of a transducer array and beam forming electronics and enables very low cost imaging systems. Potentially, this device can make ultrasound imaging routine part of the clinical exam. It could also be used in emergency rooms and ambulances due to its small feature especially to detect internal bleeding.

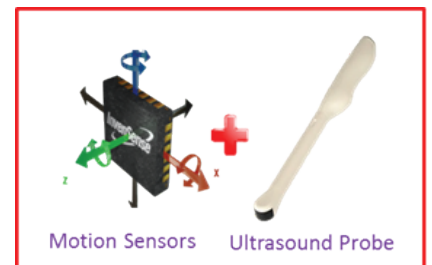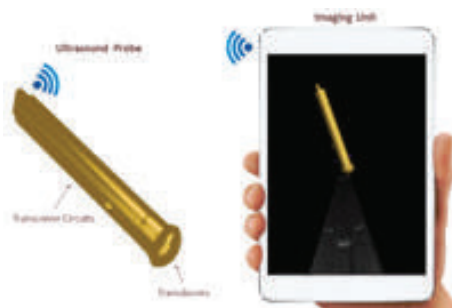

Main Advantages:

- Low cost
- Small form factor (handy use)
- Wireless interface



VERTICAL GAP ACTUATOR FOR ULTRASONIC TRANSDUCERS AND FABRICATION OF THE SAME



Inventors:

- Asst. Prof. Göksenin Yaralıoğlu



Potential Areas of Application:

- Ultrasound imaging
- Transducer manufacturing



State of Development:

- TRL 3



Patent Status:

- EP3221064B1
- WO2016080931A1
- TR2014/13718

Invention Summary:

In order to address the limitations of piezoelectric transducers, capacitive micro machined ultrasonic transducers (CMUTs) have been introduced. Main challenges of CMUTs can be traced to lack of high sound pressure generation, low receive sensitivity and highly nonlinear behavior of the parallel plate actuation. The main objective of this invention is to develop novel cell geometry for CMUT transducers where the sensitivity and the maximum output pressure do not have conflicting requirements over the gap. In this geometry, the motion of the membrane does not affect the height of the gap where the actuation forces are built. Also there are large cavities under the membrane in the horizontal direction such that these cavities do not interfere with the membrane motion even for large membrane displacement amplitudes. This enables membrane to move without any hard limits.

Main Advantages:

- To solve the low output pressure problem of CMUTs
- Increase in the receive sensitivity
- Cost reduction



WEARABLE ARM SUPPORT



Inventors:

- Asst. Prof. Ahmet Tekin
- Asst. Prof. Polat Sendur
- Pegah Nomanfar
- Mohamed O Abouzeid
- Ahmet Mete Muslu



Potential Areas of Application:

- Hybrid Artificial Organs



State of Development:

- TRL 3




Patent Status:

- TR2018/00340

Invention Summary:

Electromechanical support systems or robots in general are high-tech high cost equipment that may not be viable for many day to day applications. This art encompasses a low-cost motorless multi-purpose robust wearable unit with wireless activated agile lock-unlock joint mechanisms. There are many human run basic operations that require high level of precision, low cost and minimal risk all at the same time. The mechanical support arm being fixated at the shoulder relieves the load on the operator and improves overall stability and stamina during the action.

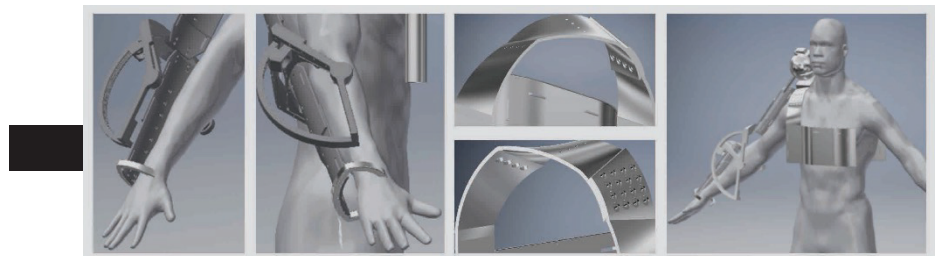

Main Advantages:

- Low cost
- Minimal risk
- Bluetooth activation

Industrial Applications





AN ELECTROMAGNETIC ACTUATOR TO ACHIEVE SOFT LANDING AND THE CONTROL METHOD THEREOF



Inventors:

- Asst. Prof. Özgür Ertunç
- Asst. Prof. Özkan Bebek
- Muhammed Sarmad Qureshi
- Mehmet Kuntuz Polat



Potential Areas of Application:

- Electromagnetic
- Construction
- Off Linear Physical Movements



State of Development:

- TRL 5



Patent Status:

- WO2020101580A1

Invention Summary:

Electromechanical actuators are replacing pneumatic and hydraulic actuators as they provide more reliable and accurate control, they are more efficient and less hazardous to the environment. Moreover, compactness along with rugged, simple in construction and lower cost makes them suitable to be used in many domestic and commercial applications, which require on and off linear physical movements. The motion is induced by the current supplied to a coil of wire, which then give rise to a magnetic force, then this force is used to control the motion of the electromechanical actuator being controlled. The present invention relates to an electromagnetic actuator and a method for controlling the movement of an armature of the electromagnetic actuator.

Main Advantages:

- No sensors are used
- Our invented signal uses the formula
- Uses Uni-Polar Solenoids
- Uses voltage signal
- Open Loop System.



ROBOTIC MANIPULATOR INCLUDING PNEUMATIC ARTIFICIAL MUSCLE



Inventors:

- Asst. Prof. Özkan Bebek
- Asst. Prof. Barkan Uğurlu
- Mehmet Can Yıldırım



Potential Areas of Application:

- Hybrid Artificial Organs



State of Development:

- TRL 4




Patent Status:

- WO2020055342A1

Invention Summary:

The present invention provides systems and methods for the controlled actuation of robotic manipulators with cost effectiveness and efficiency. The present invention relates to robotic manipulators actuated by pneumatic artificial muscle (PAM) devices and methods of actuation, and in particular to pitch, roll, and yaw actuation of robotic manipulators.

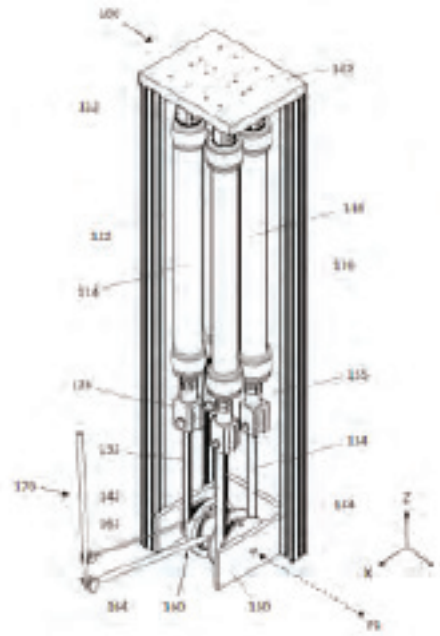

Main Advantages:

- Actuators are at a remote location
- Compliant
- Under actuated design for 3DOF and 4DOF actuated arms
- Pneumatically actuated



AN ATOMIZER AND ATOMIZATION SYSTEM USING THE SAME



Inventors:

- Asst. Prof. Özgür Ertunç
- Gökhan Kayansalçık



Potential Areas of Application:

- Atomization of highly viscous liquids



State of Development:

- TRL 3




Patent Status:

- WO2021040635A1

Invention Summary:

The present invention relates to an atomizer providing transformation of a bulk liquid into a spray of liquid droplets in a surrounding gas or vacuum. More specifically, the present invention relates to an atomizer having a high velocity rotating surface and a method for droplet atomization by high velocity rotating surface. The present invention relates to an atomizer comprises, at least 5 one body, a circular lateral surface surrounding the body and blades positioned in one piece on the lateral surface at selected angles to enhance atomization and at a selected distance to each other and at least one body integrated with the body that providing high velocity rotational motion to atomizer.



Main Advantages:

- Very fine droplets of highly viscous liquids
- High velocity
- Reliable

Construction Materials





CEMENT-BASED COMPOSITIONS WITH IMPROVED RHEOLOGICAL PROPERTIES AND METHODS FOR PRODUCTION THEREOF



Inventors:

- Asst. Prof. Zeynep Başaran Bundur
- Ali Amiri



Potential Areas of Application:

- Cement Based Binders
- Grout Injections for Crack Repair



State of Development:

- TRL 5



Patent Status:


- CN108290789A
- WO2017119859A1
- TR2016/00205

Invention Summary:


Existing biomaterials in the field of construction are achieved Complex designs in structures mostly require highly flowable mixes which requires stabilizers (a.k.a viscosity modifying agents, VMA) to improve coherence and segregation resistance. However, compatibility of these stabilizers with other chemical additives and their production processes are being questioned. Bacterial cells were directly added to the mix water to improve the rheological performance a higher degree of thixotropy, greater low shear rate viscosity and resistance to segregation compared to control grouts.



Cement paste
with superplasticizers
(Polycarboxylate)



**HIGHER
SEGREGATION
RESISTANCE**



BIOCRETE with
superplasticizers
(Polycarboxylate)

Main Advantages:

- Incorporation of cells increased the viscosity leading to higher resistance to segregation and bleeding of cement-based materials.
- Compatible with superplasticizers and other rheology modifying agents.
- Applicable for various mixing procedures particularly for 3D-printing.



COMPOSITE UNBONDED PRECAST CONCRETE SHEAR WALLS



Inventors:

- Asst. Prof. Bülent Erkmen



Potential Areas of Application:

- Precast concrete shear wall self-centering systems



State of Development:

- TRL 3




Patent Status:

- TR2017/13348

Invention Summary:

The present invention relates to an adherence post-tensioning system for buildings and more particularly to an adherent post-tensioned precast concrete curtain wall for the seismic lateral load-bearing system of buildings located in earthquake zones. The invention is a structural shear wall element for seismic lateral load resisting system of buildings located in seismic regions. The wall system is designed to have superior self-centering capability while undergoing lateral inelastic displacement with little to no structural damage and significant energy dissipation ability.

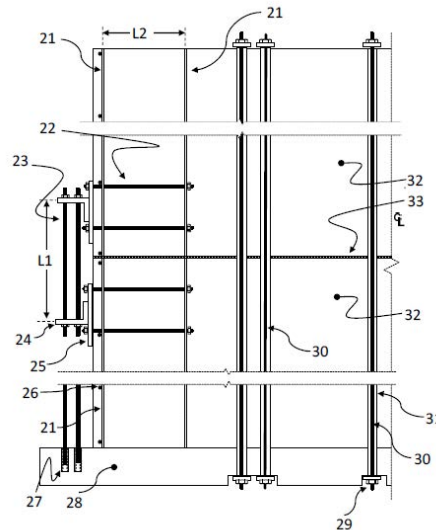

Main Advantages:

- Adequate energy dissipation capacity
- Shorter vibration duration
- Significant improvement in HSS section



MANUFACTURING METHOD FOR A BUILDING SYSTEM IN REGARDS STRUCTURAL AND ENVIROMENTAL FACTORS



Inventors:

- Asst. Prof. Sevil Yazıcı



Potential Areas of Application:

- Cement based binders
- Bricks



State of Development:

- TRL 3



Patent Status:



- US20190375132
- TR2018/09558

Invention Summary:

Space exploration has been used to investigate possibilities for the creation of human colonies in extraterrestrial environments. The proposed methodology aims to propose a comprehensive approach in which the form generation process is driven by environmental conditions, specifically the dune fields on Mars. A set of architectural geometry, described computationally, can respond to different spatial conditions, such as shell structures, from fully enclosed to semi-open surfaces. In this approach, in situ materials are used with robotic fabrication; three dimensional (3D) printing is used on Martian land. A material system, which creates a titanium-dioxide-based shielding layer, was developed against high radiation levels on the Martian surface. The interconnected structural modules were considered similar to the brick material called T-brick.

Main Advantages:

- The system was assessed structurally by selecting an enclosed geometry: a dome structure. Hence, the efficiency factor was calculated.
- T-brick shell is an efficient solution considering the payload constraints of the system.
- Implementation on Earth (potentially) and extraterrestrial environments in addition to Mars.



Educational Technologies





MARTIAL ARTS TRAINING GADGET



Inventors:

- Fuat Ozan Dengiz



Potential Areas of Application:

- Sports
- Martial Arts



State of Development:

- TRL 3




Patent Status:

- TR2018/02100

Invention Summary:

Martial art students usually work on their own since it's almost impossible to find someone in your level and style that has the same practice schedule with you. There is a concept practice tool for Wing Chun trainees called Wooden Dummy which has the right dimensions and angles of an average enemy but the lack of movement and guidance makes it feel like a simple wooden punching bag. Wooden dummies don't move, the arm pieces of the gadget developed by this invention moves according to the combinations as determined. Wooden dummies don't move, the arm pieces of the gadget developed by this invention moves according to the combinations as determined.

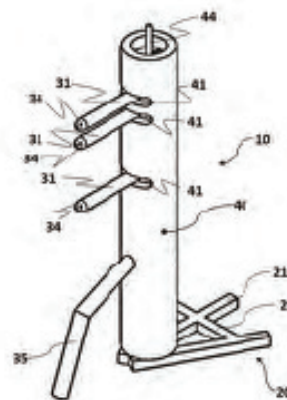

Main Advantages:

- Operable arms
- Being able to do different arm combinations
- Speed switch and reset button
- Easy to train for elementary trainees



PARALLEL PLATE CAPACITOR WITH ADJUSTABLE CAPACITANCE



Inventors:

- Asst. Prof. Hüseyin Dağ



Potential Areas of Application:

- Education
- Experiment System for High Schools
- Colleges and Universities



State of Development:

- TRL 9



Patent Status:

- TR2015/10700

Invention Summary:

In university education, main aim is to teach the technical details and the theory of a topic with examples, or tutorials to be shown. In the case of Capacitance topic of Physics courses, the experimental setups are expensive, might be dangerous for class usage and unnecessarily complex for the level of the students. "The Adjustable Capacitance Parallel Plate Capacitor" Experiment Setup is based on a well-known pedagogical example. Instead of using complex measuring devices, the system provides a variable capacitance which can be measured by simple multi-meters that are already available at laboratories. The systems geometry enables students to measure capacitance of a parallel plate capacitor with variable surface areas and plate to plate distances. Using these properties, students can measure the electric permittivity of air or any dielectric material.

Main Advantages:

- Easy to produce
- Contains no danger for class usage
- Provides capacitance up to 400 microfarads which is measurable with simple multimeters
- Enables measuring electric permittivity of air and other dielectrics
- Easy to establish

Patent Portfolio

2021



TECHNOLOGY
TRANSFER
OFFICE



Nişantepe District, Orman Street,
No:34-36, 34794 Çekmeköy/İstanbul



+90(216) 564 99 48



ipr@ozyegin.edu.tr



tto.ozyegin.edu.tr/en